



Model	Input		Max Pressure			Max Vacuum			Net Weight	
	RPM	SCFM	BHP	mbar	"H2O	BHP	"Hg	"H2O	Noise Level	kg lbs
RBB-37	2500	725	33	490	197	23	11	152	85 db(A)	
	2850	845	40	590	237	40	13.5	185	87 db(A)	
	3500	1050	49	590	237	48	16.5	225	94 db(A)	
	4000	1155	85	590	237	63	19.4	265	97 db(A)	
	4500	1360	92	590	237	n/a	n/a	n/a	98 db(A)	

*Refer to curves below for detailed performance data. Data subject to change without notice. Actual performance may vary by ±10%. For detailed BHP (Brake HP) ratings, visit www.all-star-usa.com or contact All-Star Products

STANDARD FEATURES

- Housing - Aluminum
- Impeller - Aluminum, dynamically balanced
- Direct drive or V-belt input
- Quiet operation
- Inlet & outlet silencers included
- Motor shaft seal standard
- Regreasable bearings
- Pressure intake filter as standard
- Intake pressure gauge as standard

AVAILABLE AS

- **Bare Blower**
- **Direct Connected Package**
Includes ac motor, coupling, coupling guard mounted and assembled onto a heavy duty steel base plate
- **V-Belted Package**
Includes ac motor, sheaves, v-belts, belt guard, slide base mounted and assembled onto a heavy duty steel base plate



V-Belt Connected Package

TECHNICAL DATA

[Available online www.all-star-usa.com]


- Performance Temperature Rise Curves
- AutoCad files
- Parts List
- Full load amperage



RoHS Compliant

PRESSURE DATA CURVES ±10%

[See reverse side for Vacuum Curves]

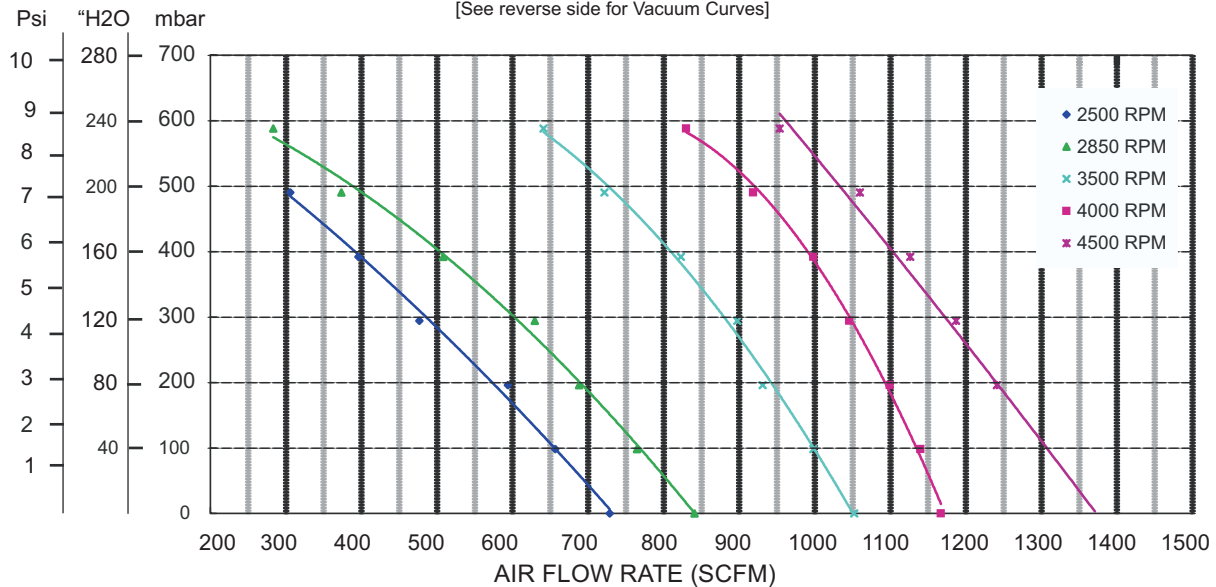

New page December 30, 2006 RBB-37 Series
Subject to change without notice.

