



Model	Input		Max Pressure				Net Weight		
	RPM	SCFM	BHP	mbar	"H2O	Psi	Noise Level	kg	lbs
RHBB-22	3500	1550	20	35	13.8	0.5	84 db(A)		
		1475	25	103	41.4	1.5			
		1200	30	241	97	3.5			

*Refer to curves below for detailed performance data. Data subject to change without notice. Actual performance may vary by ±10%.

STANDARD FEATURES

- Housing - Aluminum
- Impeller - Aluminum, dynamically balanced
- Direct drive or V-belt input
- Quiet operation
- Inlet & outlet silencers included
- Regreasable bearings
- Pressure intake filter as standard
- Intake pressure gauge as standard

AVAILABLE AS

- **Bare Blower**
- **Direct Connected Package**
Includes ac motor, coupling, coupling guard mounted and assembled onto a heavy duty steel base plate
- **V-Belted Package**
Includes ac motor, sheaves, v-belts, belt guard, slide base mounted and assembled onto a heavy duty steel base plate



Direct Connected Package


TECHNICAL DATA

- [Available online www.all-star-usa.com]
- Performance Temperature Rise Curves
 - AutoCad files
 - Parts List
 - Full load amperage



RoHS Compliant

**HIGH FLOW MODEL
PRESSURE DATA CURVES ± 10%**

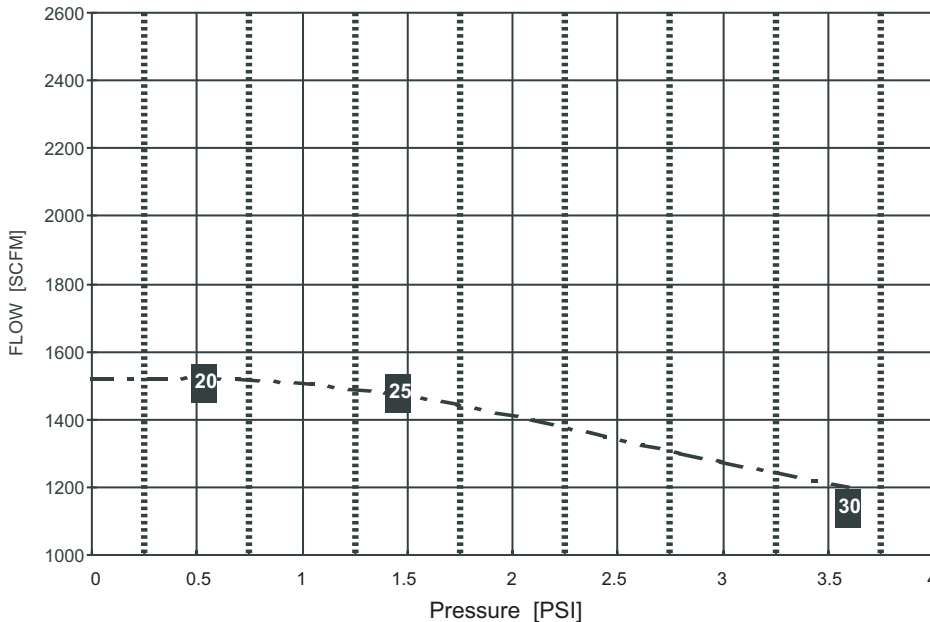

Two Stage

Model RHBB-22 Series

New page December 30, 2006 RHBB-22 Series
Data subject to change without notice.

