



Model	Input RPM	Max Pressure					Noise Level		Net Weight	
		SCFM	BHP	mbar	"H2O	Psi	kg	lbs		
RHBB-55	3500	2550	50	-0-	-0-	-0-	84 db(A)			
	2050	60	97	39	1.4					
	1160	75	249	100	3.6					

\*Refer to curves below for detailed performance data. Data subject to change without notice. Actual performance may vary by ±10%.

**STANDARD FEATURES**

- Housing - Aluminum
- Impeller - Aluminum, dynamically balanced
- Direct drive or V-belt input
- Quiet operation
- Inlet & outlet silencers included
- Regreasable bearings
- Pressure intake filter as standard
- Intake pressure gauge as standard

**AVAILABLE AS**

- **Bare Blower**
- **Direct Connected Package**  
Includes ac motor, coupling, coupling guard mounted and assembled onto a heavy duty steel base plate
- **V-Belted Package**  
Includes ac motor, sheaves, v-belts, belt guard, slide base mounted and assembled onto a heavy duty steel base plate



V-Belt Connected Package

**TECHNICAL DATA**


[Available online [www.all-star-usa.com](http://www.all-star-usa.com)]

- Performance Temperature Rise Curves
- AutoCad files
- Parts List
- Full load amperage



RoHS Compliant

**HIGH FLOW MODEL PRESSURE DATA CURVES ± 10%**

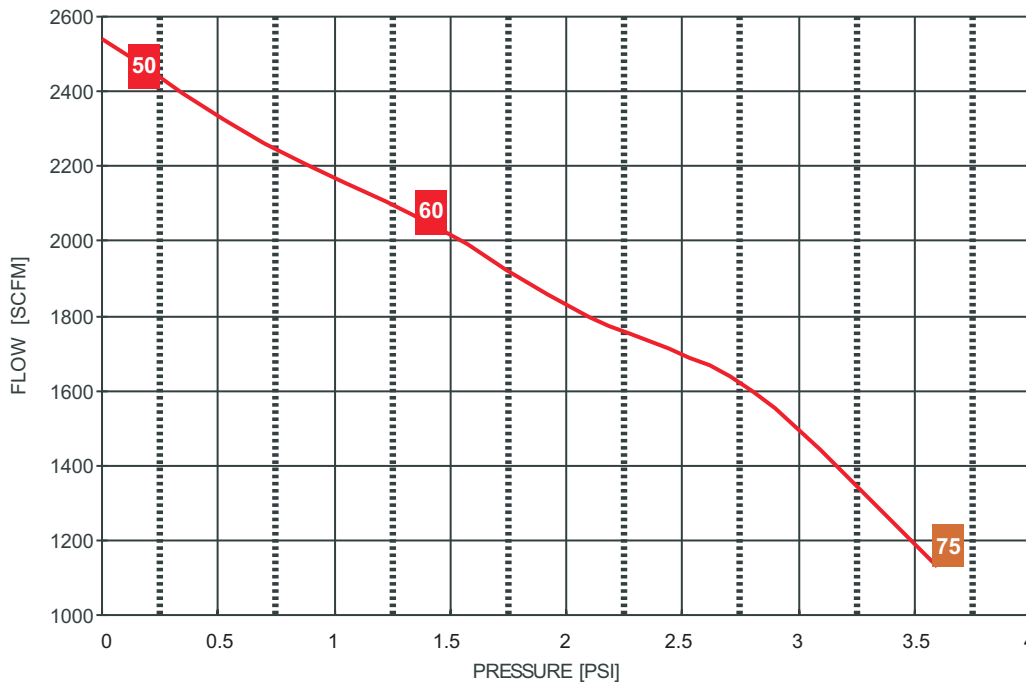

# Two Stage

# Model RHBB-55 Series

New page December 30, 2006 RHBB-55 Series  
Subject to change without notice.

