




Model	Voltage	Watt	FLA	CFM	psig	Sound Level		Net Weight	
						"HG	db(A)	kg	lbs
RPD10-1	1/60/115	75	1.3	0.42	35.5	21.6	w/a	1.1	2.2
RPD10-2	1/60/230	75	.65	0.42	35.5	21.6	w/a	1.1	2.2
RPD10-3	1/50/220	75	.73	0.35	35.5	21.6	w/a	1.1	2.2

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

STANDARD FEATURES

- Compact rigid connecting rod
- Heat-releasing aluminum piston housing
- Cylinder hard-coated for long life
- Sturdy valve plate provides trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector included

- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- -4 to 40 Deg C ambient
- Open motor enclosure

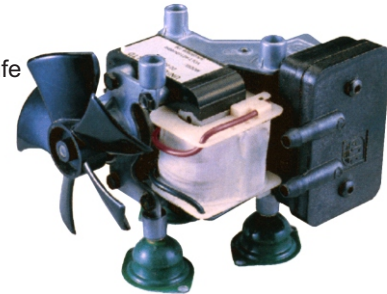

ACCESSORIES

An air filter is required to obtain warranty coverage.

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just click on the links below

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)			
	Length	Width	Height
Outside	4.9	5.1	4.1
Mounting	2.1	2.1	2.1

Registered by one or more of these standards agency

