




Model	Voltage	Watt	FLA	CFM	“HG	psig	Sound Level	Net Weight	
							db(A)	kg	lbs
RPD15N-1	1/60/115	80	1.5	0.52	22	35.5	w/a	1.4	3.1
RPD15N-2	1/60/230	80	0.8	0.52	22	35.5	w/a	1.4	3.1
RPD15N-3	1/50/220	80	0.8	0.46	22	35.5	w/a	1.4	3.1

\*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

**STANDARD FEATURES**

- Compact rigid connecting rod
- Heat-releasing aluminum piston housing
- Cylinder hard-coated for long life
- Sturdy valve plate provides trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector included

- Split phase motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- -4 to 40 Deg C ambient
- Open motor enclosure

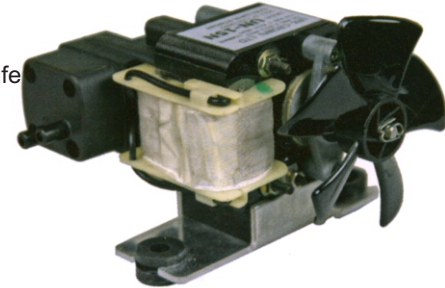

**ACCESSORIES**

An air filter is required to obtain warranty coverage.

**TECHNICAL DATA** Available on line [www.all-star-usa.com](http://www.all-star-usa.com)

If viewing this page online, just click on the links below

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)			
	Length	Width	Height
Outside	5.5	4.3	3.3
Mounting	0.8	3.5	-0-

Registered by one or more of these standards agency

