




Model	Voltage	Watts	Amp	Pressure		Vacuum		Noise Level db(A)	Net Weight	
				CFM	psig	"Hg	"Hg		kg	lbs
RPD36ZD-12	12 vdc	40	3.4	.63	21.3	23.6		w/a	8.2	4.0

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

STANDARD FEATURES

- Compact rigid designed connecting rod
- Heat-releasing designed aluminum die-cast piston housing
- Cylinder hard-coated treatment for long running life
- Sturdy valve plate design provides trouble-free, long service life
- Special sealing cap for long service life
- Quiet operation - below OSHA limits
- 7-40 Deg C Ambient
- Open motor enclosure
- BLDC 12 vdc

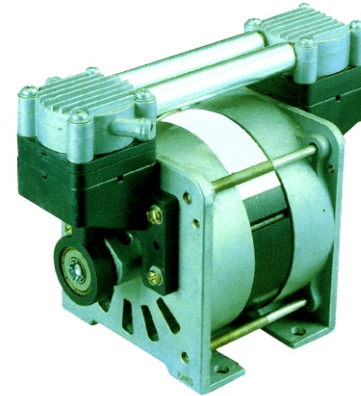

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just *click on the links below*

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)			
	Length	Width	Height
Outside	7.48	4.13	6.89
Mounting	4.96	3.48	M6

Registered and approved by one or more of these standards agency
 CE ETL ISO 9001 RoHS Compliant cULus

