




Model	Voltage	Watt	FLA	CFM	"HG	psig	Sound Level	Net Weight	
							db(A)	kg	lbs
RPD50F-1	1/60/115	55	w/a	.7	25.9	35.5	w/a	2.5	5.5
RPD50F-2	1/60/230	55	w/a	.7	25.9	35.5	w/a	2.5	5.5
RPD50F-3	1/50/220	55	w/a	.6	25.9	35.5	w/a	2.5	5.5

\*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

**STANDARD FEATURES**

- Compact rigid connecting rod
- Heat-releasing aluminum piston housing
- Cylinder hard-coated for long life
- Sturdy valve plate provides trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector included

- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- -4 to 40 Deg C ambient
- Open motor enclosure

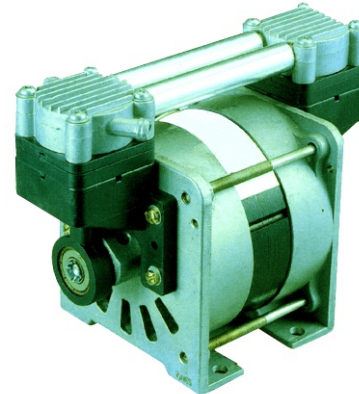

**ACCESSORIES**

An air filter is required to obtain warranty coverage.

**TECHNICAL DATA** Available on line [www.all-star-usa.com](http://www.all-star-usa.com)

If viewing this page online, just click on the links below

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)			
	Length	Width	Height
Outside	6.3	3.5	4.9
Mounting	1.8	3.0	-0-

Registered by one or more of these standards agency

