




Model	Voltage	mA	CFM	Vacuum "Hg	Noise Level db(A)	Net Weight gram	lbs
RPV16D-12	12 vdc	800	.45	19.68	w/a	280	.61

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

STANDARD FEATURES

- Compact rigid designed connecting rod
- Heat-releasing designed aluminum die-cast piston housing
- Cylinder hard-coated treatment for long running life
- Sturdy valve plate design provides trouble-free, long service life
- Special sealing cap for long service life
- Quiet operation - below OSHA limits
- 7-40 Deg C Ambient
- Open motor enclosure

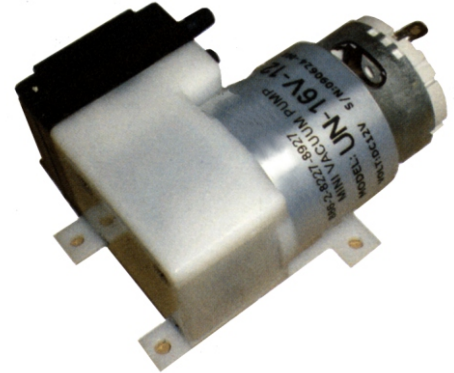

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just *click on the links below*

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)				
	Length 1	Length 2	Width	Height
Outside	3.32	-	1.57	2.55
Mounting	1.77	2.16	1.96	2.36

Registered and approved by one or more of these standards agency

