



Model	Voltage	Watts	FLA	CFM	Sound Level		Net Weight	
					"HG	db(A)	kg	lbs
RPV30-1	1/60/115	100	2.5	1.1	23.6	w/a	4	9
RPV30-2	1/60/230	100	1.2	1.1	23.6	w/a	4	9
RPV30-3	1/50/220	100	1.2	0.7	23.6	w/a	4	9

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ±10%.


STANDARD FEATURES

- Compact rigid connecting rod
- Heat-releasing die-cast piston housing
- Cylinder hard-coated treatment for long life
- Sturdy valve plate provides trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector included

- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- Quiet operation
- -4 to 40 Deg C ambient
- Open motor enclosure

ACCESSORIES

An air filter is required to obtain warranty coverage.

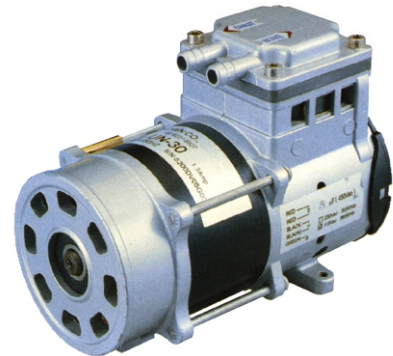

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just click on the links below

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

	DIMENSIONS (Inch)		
	Length	Width	Height
Outside	7.3	4.4	6.3
Mounting	5.0	3.8	M6

Registered by one or more of these standards agency

