



Model	Voltage	Watts	FLA	CFM	"HG	Sound Level		Net Weight	
						db(A)	kg	lbs	
RPVH45-1	1/60/115	100	0.9	1.6	29.1	w/a	3.4	8	
RPVH45-2	1/60/230	100	0.9	1.6	29.1	w/a	3.4	8	
RPVH45-3	1/50/220	100	0.9	1.4	29.1	w/a	3.4	8	


*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

STANDARD FEATURES

- Compact rigid connecting rod
- Heat-releasing aluminum piston housing
- Cylinder hard-coated treatment for long life
- Sturdy valve plate design for trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector included
- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- -4 to 40 Deg C ambient
- Open motor enclosure

ACCESSORIES

An air filter is required to obtain warranty coverage.

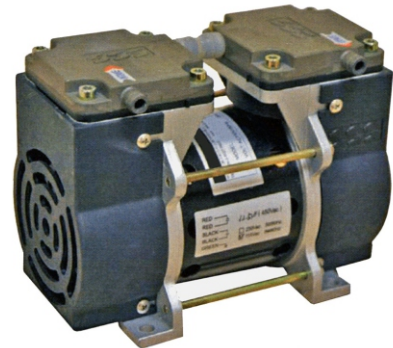

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just *click on the links below*

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

DIMENSIONS (Inch)

	Length	Width	Height
Outside	7.3	3.7	5.5
Mounting	4.4	3.8	M6

Registered by one or more of these standards agency

