




Model	Voltage	Watts	FLA	CFM	"HG	Sound Level		Net Weight	
						db(A)	kg	lbs	
RPVH90-1	1/60/115	250	2.4	1.9	29.1	60	7.4	17	
RPVH90-2	1/60/230	250	1.5	1.9	29.1	60	7.4	17	
RPVH90-3	1/50/220	250	1.5	1.6	29.1	58	7.4	17	

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ±10%.

STANDARD FEATURES

- Compact rigid connecting rod
- Heat-releasing aluminum piston housing
- Cylinder hard-coated treatment for long life
- Sturdy valve plate provides trouble-free, long service life
- Shock absorbing mounting feet
- Motor thermal protector

- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents contact
- Special sealing cap for long life
- -4 to 40 Deg C ambient
- Open motor enclosure

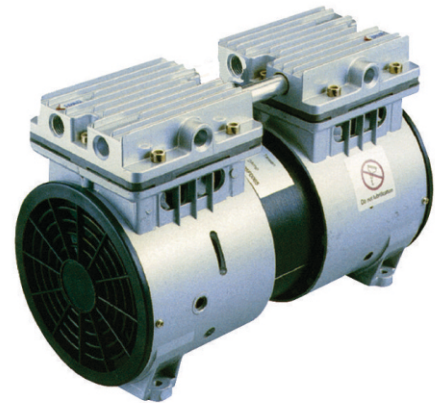

ACCESSORIES

An air filter is required to obtain warranty coverage.

TECHNICAL DATA Available on line www.all-star-usa.com

If viewing this page online, just click on the links below

- Performance Temperature Rise Curves
- Standard Dimension Page
- Amperage
- Accessories
- Wiring Diagram

	DIMENSIONS (Inch)		
	Length	Width	Height
Outside	9.8	5.0	6.9
Mounting	8.1	3.5	M6

Registered by one or more of these standards agency

