




Model	Voltage	Watts	FLA	CFM	"HG	Sound Level		Net Weight	
						db(A)	kg	lbs	
RPVSE250-1	1/60/115	300	w/a	7.8	26.8	w/a	13	24.6	
RPVSE250-2	1/60/230	300	w/a	7.8	26.8	w/a	13	24.6	

*Refer to curves below for detailed performance data. Performance data and product specifications are subject to change without prior notice. Actual performance may vary by ± 10%.

STANDARD FEATURES

- Compact rigid designed connecting rod
- Heat-releasing designed aluminum die-cast piston housing
- Cylinder hard-coated treatment for long life
- Sturdy valve plate design provides trouble-free, long service life
- Shock absorbing mounting feet included
- Motor thermal protector included
- Capacitor start motor
- 4 pole AC motor
- High efficient cooling fan
- Fan cover prevents accidental contact
- Special sealing cap for long service life
- Quiet operation - below OSHA limits
- Suitable for operation in -4 to 40 Deg C ambient
- Open motor enclosure

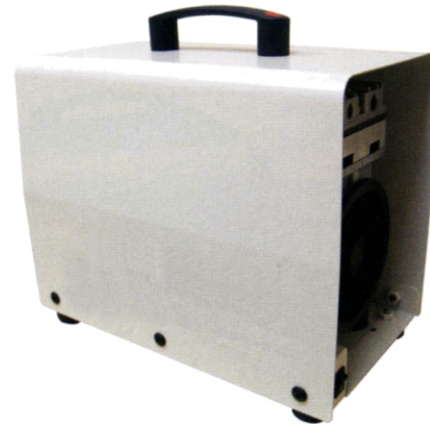

DIMENSIONS (Inch)			
	Length	Width	Height
Outside	13.4	7.3	12.09

Registered by one or more of these standards agency

